




ROBOTRAX® Dresspacks

Cable Carrier Solutions for 3D Movements

Explore configurations and
application guidance Inside >

Tel: (800) 263-7088
Web: Tsubaki.ca

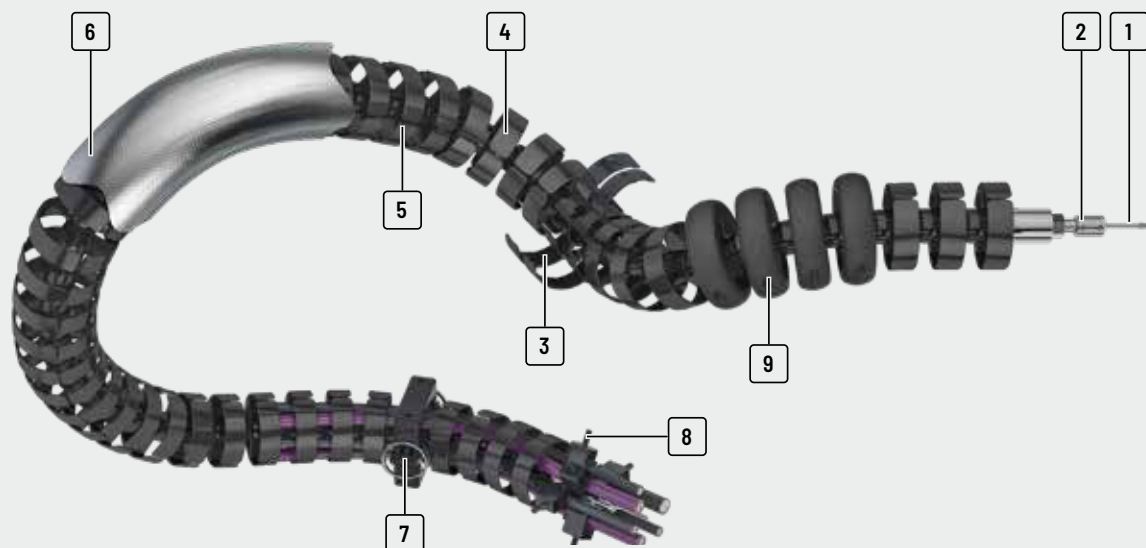

- | | | | |
|---|--|--|--|
| <p>1 Steel cable for transferring extremely high tensile forces</p> <p>2 Tension piece for locking the chain links</p> <p>3 Type with toolless opening swivel crossbars and divider module available</p> | <p>4 Open design</p> <ul style="list-style-type: none"> - Fast cable laying as the cables are simply pressed in - Easy checking of all cables <p>5 Special plastic for long service life</p> | <p>6 Protective covers or heat shields made from different materials are available for different environmental conditions</p> <p>7 Quick-release bracket for fixing and continuation</p> <p>8 Strain relief with LineFix clamps</p> | <p>9 Protection against hard impacts, excessive abrasion and premature wear as well as limitation of the bending radius through protector</p> |
|---|--|--|--|

Features

- » Suitable for three-dimensional swivel and rotation movements
- » Ideal for a long service life of the cables:
 - The bending radius does not fall below the minimum when using protectors
 - The cables can be separated in three chambers
- » Also ideal for turntables



Swiveling crossbars and divider module (R140X)



Active return mechanism with the PBU pull back unit (R040 - R100)



Fast cable laying by simply pressing in the cables (R040 - R100)



Strain relief for secure fixing of the cables

ROBOTRAX® System | Overview

Type	Opening variant	h_i [mm]	B_i [mm]	D_a [mm]	t [mm]	KR [mm]	Radial link rotation on 1 m length [°]	Additio- nal load ≤ [kg/m]	Cable- d _{max} [mm]
R040									
		10	27	40	21.5	70 [75]	± 450	0.7	8.5
R056									
		14	39	56	32	90 [105]	± 300	1.1	11
R075									
		22	52	75	40	125 [140]	± 215	4	18
R085									
		24	54	85	40	130 [170]	± 215	5	20
R100									
		31	64	100	40	130 [175]	± 215	6	27

Values in [] apply when using protectors

Type	Opening variant	h_i [mm]	B_i [mm]	D_a [mm]	t [mm]	KR [mm]	Radial link rotation on 1 m length [°]	Additio- nal load ≤ [kg/m]	Cable- d _{max} [mm]
R140X									
		48	74	140	50	125 [225]	± 200	10	42

Values in [] apply when using protectors

ROBOTRAX® System | Design principle



Pitch
21.5 – 40 mm



Inner heights
10 – 31 mm



Inner widths
27 – 64 mm




Bending radii
70 – 130 mm

Chain links single part

The basic structure of ROBOTRAX® consists of plastic links. These have spherical snap-on connections on both sides. This allows the individual links to be snapped together to form a cable carrier.

Protectors ensure that the bending radius does not fall below the minimum in any direction. The links can be rotated in the radial direction (see table values). The cables can be separated in three chambers.

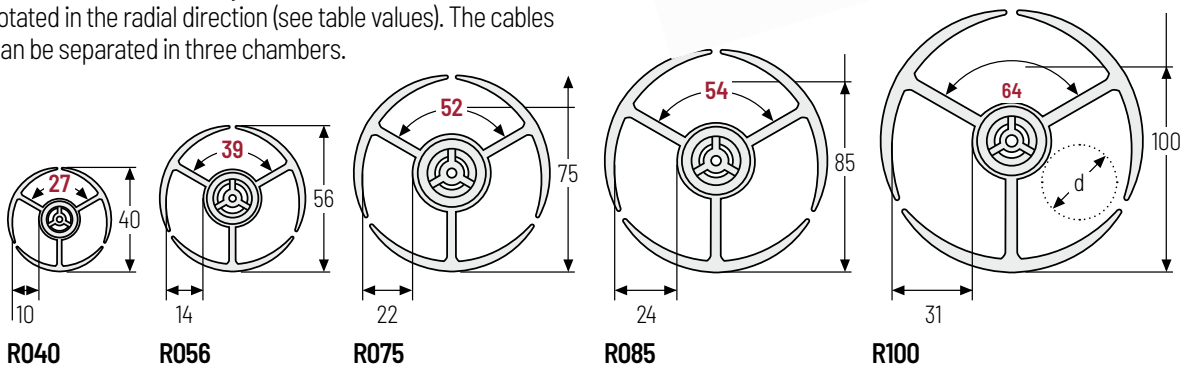

Pitch
50 mm



Inner height
48 mm




Inner width
74 mm



Bending radius
125 mm

Chain links with crossbars

The basic construction is similar to the ROBOTRAX® types with single part design. Swiveling crossbars with snap locks make it easy to open and safely close the cable carrier. In addition, the three chambers can be divided horizontally and vertically by a divider module for precisely separating cables and hoses.

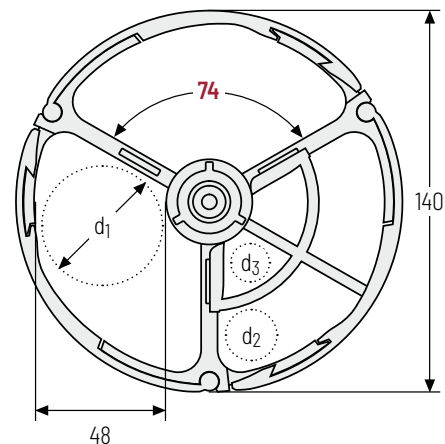

Mounting kit

Fast movements of the robot arms generate high accelerations and therefore high tensile forces on the cable carrier.

To transfer these tensile forces, ROBOTRAX® has a hole at the center of each chain link through which the steel cable is pulled. This steel cable takes on the function of force transmission.

The steel cable is fixed with a clamping piece on one side. ROBOTRAX® permits accelerations up to 10 g.

The clamping piece can be used to easily set the chain links to the desired tension and adjust them at any time.

Long service life of the cables and hoses:

The forces are primarily transmitted by the cable carrier and not by cables and hoses.

The mounting set consists of steel cable, clamping and tension piece for up to 5 m cable carrier length.



Quick-release brackets

The ROBOTRAX® is fixed and continued with quick-release brackets which are attached with screws. The quick-release brackets fit on any chain link of the respective size. This means the fixing points can be individually adjusted to the motion sequence.

Locking bolt:


100% recyclable, cost-effective locking bolt, optimized for installation space and environment. The bolt can be assembled and disassembled without tools.

(Also available as a screwed version)



Dimensions

	R040	R056	R075	R085	R100	R140X
h₁ [mm]	54	70	86	105	120	164
h₁ [mm]	15	22	28	30	32	50
l₂ [mm]	-	-	-	-	-	20
b₁ [mm]	82	86	110	133	150	197.4
b₂ [mm]	50	63	82	96	112	158
b₃ [mm]	36	48	64	72	70	70
b₄ [mm]	18	24	32	36	35	35
b₅ [mm]	-	-	-	-	-	32
Screws	2xM4	2xM4	2xM6	2xM8	2xM8	4xM8

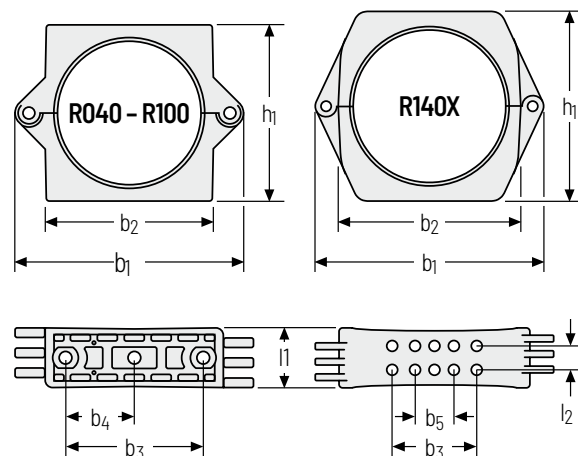

ROBOTRAX® System | System components

Heat shield/protective cover

Heat shield: The heat shield made from aluminum-coated textile fibers protects the ROBOTRAX® system and inserted cables against flying sparks, weld spatter and radiated heat.

Protective cover: The protective cover made from coated polyester protects against aggressive cutting fluids, hydraulic oils, fine dust and paint spatter.



Strain relief for cable ties

(available for all types)
For secure fixing of the cables.
The strain relief can be used on either end.

Strain relief LFR

(for types R075, R085, R100 and R140X)
Secure cable fixing, gentle on the cables.

Multi-layer cable fixing is also possible with double and triple LineFix® clamps. Several systems can be installed in sequence.



PBU pull back unit

(for types R040, R056, R075, R085 and R100)

PBU: With fast movement sequences and large work envelopes, the relatively long carriers knock against the robot arm. The repeated impact significantly reduces the service life of the cable carrier and the cables within, and the entire system can fail. Downtimes cause high costs and problems in the manufacturing process – so they have to be avoided.

- » Compact design: fewer interfering contours and lower risk of collision
- » Maximum flexibility for cable carrier routing
- » No maintenance on the retraction element required
- » Standard mounting for KUKA, ABB and FANUC

PBU is available for new robots, regardless of size, manufacturer, type or application, as well as retrofits and upgrades for existing workcells. It can be mounted vertically, horizontally or upside down. The extension length of the LSH 3 is 350 mm.



	R040	R056	R075	R085	R100
H_z [mm]	187	187	221	221	268
Type	Fotensile forces F [N]				
PBU Light	40.0				
PBU Standard	80.0				
PBU Heavy	110.0				

Protector

The service life of the cable carriers and cables is significantly reduced by impact during fast movement sequences and in large work envelopes. The Protector protects the cable carrier against hard impacts, excessive abrasion and premature wear, while also acting as a limitation for the smallest bending radius. Downtimes are minimized. Not the entire cable carrier has to be replaced, but only the Protector in some cases.



ROBOTRAX® System | System components


Turntable for quick-release bracket

One additional degree of freedom on the attachments points. When mounted on a turntable, the quick-release bracket can rotate as well, to offer increased flexibility during complex robot movements.



Dimensions

	R040	R056	R075	R085	R100	R140X
A [mm]	57	65	82	96	112	96
B [mm]	57	57	57	70	70	70
C [mm]	43	43	43	75	75	70
D [mm]	43	43	43	45	45	20
E [mm]	36	48	64	72	70	-
F [mm]	-	-	-	-	-	8
H [mm]	27.5	27.5	27.5	34	34	43
d₁ [mm]	M6	M6	M6	M6	M6	M8
d₂ [mm]	M4	M4	M6	M8	M8	-
d₃ [mm]	-	-	-	-	-	14
d₄ [mm]	-	-	-	-	-	20

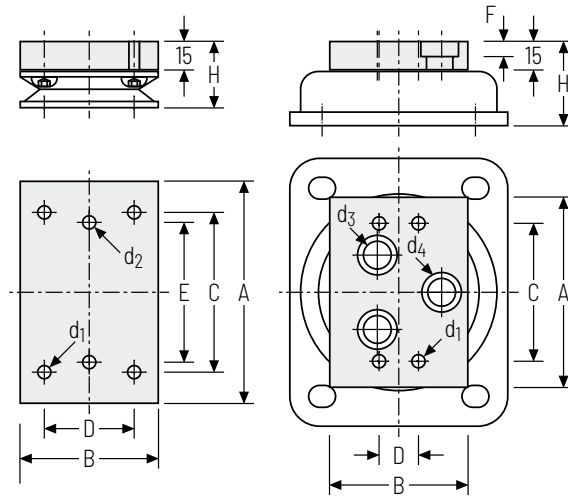

Set consisting of

Sample image



Coil spring for quick-release bracket

If the quick-release bracket is mounted on a coil spring, it can move elastically in all directions, deflect in 3 dimensions and spring back.

Dimensions

	R040	R056	R075	R085	R100
A [mm]	52	64	82	96	112
B [mm]	36	48	64	72	70
C [mm]	5	5	6.5	8.5	8.5
D [mm]	26	30	34	34	34
L [mm]	110	110	-	-	-
	150	150	-	-	-
	-	-	165	165	165
	-	190	-	-	-
	-	-	230	230	230
	-	-	315	315	315
	-	-	465	465	465



Cobot holder


(for types R040 and R056)

The ROBOTRAX® cobot holder was specially developed for sizes R040 and R056 as well as for corrugated tubes from the FIPLOCK® series (23-48). As a high-quality solution for industrial use, the sturdy steel straps offer non-slip support up to 100 N centrifugal force and thus ensure the trouble-free function of the cobot and the attached cables and hoses in continuous operation. It can be mounted on various surfaces and on diameters between 50-130 mm. The anti-twist design, an easily accessible lock and a protective rubber profile provide additional safety and support.

The cobot holder is versatile - from handling and quality assurance, assembly and laboratory automation to logistics, medical technology and service robotics - and ensures precision, safety and efficiency.



	R040	R056
	Order no. Set	Order no. Set
Set for Ø 50-70 mm	60552	60556
Set for Ø 70-90 mm	60553	60557
Set for Ø 90-110 mm	60554	60558
Set for Ø 110-130 mm	60555	60559

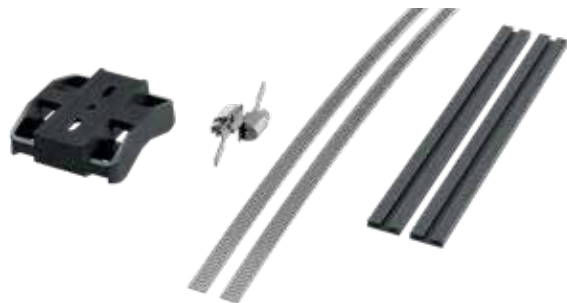



Over 65 years of innovations and thousands of realized applications

In 1953, the Waldrich Machinery Manufacturer registered a global patent for a steel "unsupported cable carrier to protect moving cables and hoses". The visionary company owner Dr. Oskar Waldrich recognized the invention's potential and established his own subsidiary for the new product in 1954: KABELSCHLEPP. Since this launch, the company has been ensuring the continuous further development of the applications involving this machine component – constantly with new product concepts, innovative materials and extensive customer service.

TSUBAKI KABELSCHLEPP is currently a global player with international representatives and subsidiaries in more than 70 countries and cable carrier systems are a permanent component of almost every machine. Our innovative solutions have proven themselves worldwide in the most diverse

industries – and in fact, no longer just in the classical application areas such as machine tools, crane systems, washing lines and medical and laboratory technology, but also in industrial robots, high-sea oil drilling platforms and space travel. Our experts develop individual products even for complex and unusual fields of usage. In this process, the application defines the material – in addition to steel cable carriers, plastic and hybrid systems are also available.

This allows for a wide range of products which can be used for countless applications. There is even an ideal solution for individual challenges – in standard widths or adapted to customer requirements on a millimeter grid. The range of products and accessories comprises over 100,000 variants. These include, for example, strain reliefs, divider systems, channels, hoses, cables, connectors and ready-to-install complete systems.



KABELSCHLEPP and TSUBAKI – together what fits together

TSUBAKI KABELSCHLEPP is integrated into the TSUBAKI Group since 2010 and made responsible for managing the worldwide Cable Carrier Systems business.

For more than 55 years, both companies have been close cooperative partners. With this integration, we will leverage our successful working relationship in one strategic enterprise.

This global enterprise offers numerous advantages:

- » An even larger product portfolio to select from
- » Global yet locally supported – vast network of more than 40 international subsidiaries
- » Global manufacturing operations allow for shorter delivery times
- » Combined R&D resources allow for quick and innovative product development

KABELSCHLEPP + TSUBAKI = MORE

MORE Product Solutions

An expanded product portfolio of TSUBAKI products and KABELSCHLEPP cable carrier systems.

MORE Innovations

A combined global R&D with even more resources ensures a quicker response to our customer's needs.

MORE Regional Service

A combined TSUBAKI and KABELSCHLEPP sales force provides added local support.
KABELSCHLEPP® products are also now available through the TSUBAKI network of distributors.

MORE Global Support

A unified global sales and support network extends to over 70 countries around the world, providing service and support when and where you need it most.

MORE Value

Together we will continue to prove our reputation as one of the industry's "Best Value" supplier in the industry.



TSUBAKI KABELSCHLEPP

PLASTIC CABLE CARRIER SYSTEMS



HYBRID CABLE CARRIER SYSTEMS



STEEL CABLE CARRIER SYSTEMS



ENCLOSED CABLE CARRIER SYSTEMS



TRAXLINE CABLES FOR MOTION



ACCESSORIES FOR CABLE CARRIERS



Note: In accordance with the policy of U.S. Tsubaki Power Transmission, LLC to consistently improve its products, the specifications in this brochure are subject to change without notice. The logos, brand names or product names in this brochure are trademarks or registered trademarks of Tsubakimoto Chain Co. and its subsidiaries in Japan, the U.S. and other Countries.